



Industrial Hydraulic Services Pty Ltd

ABN 40 004 985 559

371-397 Plummer Street, Port Melbourne, Victoria, Australia, 3207

Tel: +61 3 9645 1522 Fax: +61 3 9646 5966

Email: info@ihs-aust.com.au Web: www.ihs-aust.com.au



ISEKI



FOR FURTHER INFORMATION, PRICING, SALES & SERVICE CONTACT:

HILTON FORD - MACHINERY SALES

PH: 0448 309 365 FAX: 03 9646 5966 EMAIL: hilton@ihs-aust.com.au



MASSEY FERGUSON



ISEKI SXG TRACTOR



22hp

SXG Lawn & Garden Tractor

Smart, Reliable...
Created with you in mind.



ISEKI

ISEKI SXG TRACTOR

The all-new Iseki SXG garden & lawn tractor is the ideal work mate, equipped with all the necessary features to help you get the job done faster, easier and in comfort. Features include a powerful Iseki diesel engine, hydrostatic transmission, power steering and differential lock. Combine these with the option of a rear discharge deck and a 550 litre high-dump grass catcher and you have a total package that enables you to complete tasks without having to leave the comfort of your deluxe seat.

The unique design of the rear portal axle, enables central rear-discharge for grass cutting, without the need for expensive blowers. The Iseki SXG cuts and delivers the material to the catcher all in one operation. And because there is no need for a blower or duct, the new SXG offers an exceptional turning circle and closer cut around objects.

FEATURES



ENGINE

- Iseki 3 cylinder water-cooled engine.
- Powerful and quiet, offering increased power at low engine RPM.
- Service and regular maintenance made easy thanks to easy access to the engine.
- Top speed of 16 km/hr to get the job done quicker.



OPERATOR ENVIRONMENT & CONTROLS

- Spacious operator area features ergonomically designed controls at arms-reach.
- Two control levers for lifting and dumping.
- All controls are easily activated from the operators seat.
- Separate foot pedals for forward and reverse direction control.



REAR PORTAL AXLE & SHUTE

- Rear portal axle for central rear discharge.
- Large shute enables work in all weather conditions and terrain.
- In heavy conditions, a cleaning lever can be activated to free any grass obstructing the feed.

22 HP lawn and garden tractor


THE ISEKI DIFFERENCE

When you choose Iseki, you're not simply buying a tractor, you're investing in 80 years of industry-leading engineering and manufacturing experience. Experience that continues to produce high quality and top performing products that are built to meet today's ever increasing demands.

While Iseki has made its mark internationally, you can still feel confident knowing that they understand the unique industries of each country. During their 25 years in the Australian market they have built solid and reliable foundations, continuously delivering superb products and services that work even harder for your specific needs.

You get the expertise of your local Iseki dealer who will match the right tractor to your business and even provide flexible finance options to help fund your purchase.

Combine this with peace of mind from first-class parts and service support and you'll see what we mean by the Iseki Difference.

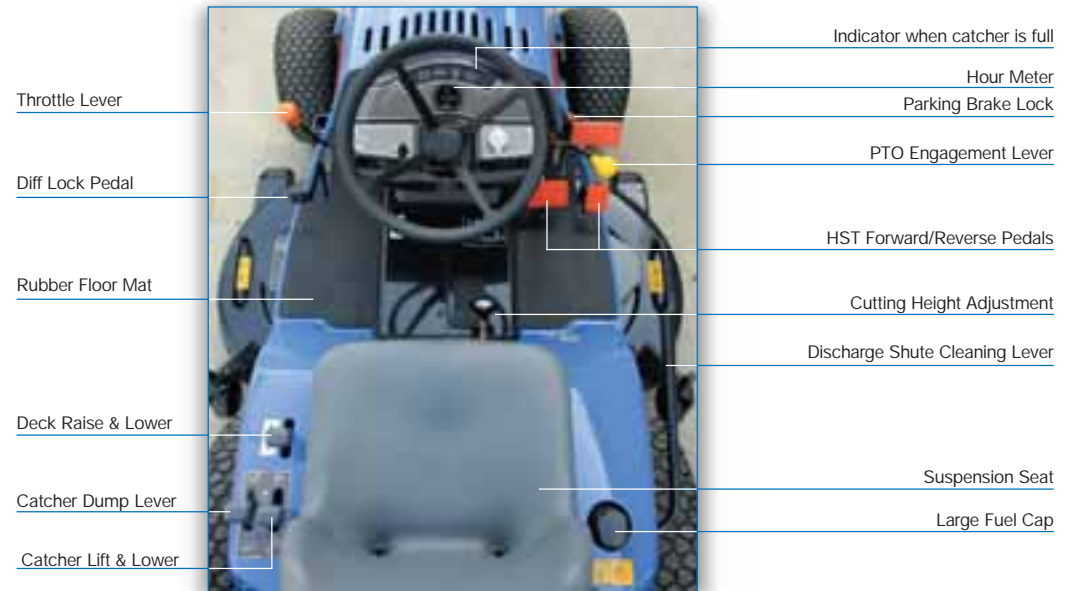

INSTRUMENT PANEL

- Provides all necessary information about the machine's operating conditions including engine and coolant temperature, and battery voltage.
- High / low beam and hazard lights are also prominently displayed.
- The large simple instrument panel is clearly visible to the operator under all working conditions.
- Standard with hour meter for accurate service & maintenance.



MOWER DECK

- Large central rear discharge deck with 2 synchronised cutting blades.
- 7 stage cutting height adjustment.
- Cutting height adjustment from 20mm – 125mm.
- Wide 54" (1370 mm) cutting width.
- Deep and open deck lifts grass for a clean and even cut.
- Large discharge area prevents build up and easily disperses clippings into the catcher.



HYDRAULIC CATCHER

- Hydraulically operated catcher with high dump operation for unloading into trailers and vehicles.
- Maximum lift height to 1.89m.
- Large capacity of 550 lt.
- Separate levers to operate the lift and dump system.
- Heavy duty, robust construction for professional and long term use.
- Horn alarm to indicate when the catcher is full.

ISEKI SXG SPECIFICATIONS

SXG22

ENGINE

Type	Iseki E3112-G03 diesel
No. of cylinders	Liquid cooled 3cyl
Displacement	1123cc
Power	22HP @ 2600 rpm
Torque	62 Nm @ 2000 rpm

CAPACITIES

Fuel tank	18.5 litres
Engine oil	2.5 litres
Transmission	14 litres
Cooling	5.1 litres

POWER TRAIN

Transmission type	Hydrostatic
Ranges	F - 16.5km/hr R - 10km/hr

PTO

Type	Shaft from front
Speeds	Mid - 1750 rpm
Clutch type	Belt tension

STEERING

Type	Hydro Power steering
------	----------------------

BRAKES

Type	Dry drum
Park brake	Mechanical foot lock

HYDRAULICS

Pump output	19.8 lt/min
-------------	-------------

ELECTRICAL SYSTEM

12 volt negative ground system	
40 Amp alternator	

WHEEL EQUIPMENT

Front turf	210/60D - 8
Rear turf	250/60D - 14

DIMENSIONS

Overall length	2110mm
Overall width	1130mm
Overall height	1265mm
Wheel base	1450mm
Weight	515kg

OPTIONAL MOWER DECK

Model	SSM A54
Type	Rotary mower
Cutting width	1372mm
No. of blades	2
Lift control	Hydraulic
Cutting height	25 - 125mm
Discharge	Rear

DIMENSIONS

Overall length	945mm
Overall width	1140mm
Overall height	385mm
Weight	115kg

OPTIONAL GRASS COLLECTOR

Model	SBC550XHE4
Type	High Dump Collector
Lift height	1900mm
Lift control	Hydraulic
Full sensor	Weight sensing
Capacity	550 Lt.
Material	Steel piping / steel netting

DIMENSIONS

Overall length	1400mm
Overall width	1115mm
Overall height	1440mm
Weight	138kg



Specifications, standard and optional equipment on products change from time to time. Please consult your local dealer to ensure your expectations are matched by the product which will be available locally at the time you take delivery.

www.agco.com.au



smart, reliable created with you in mind



FREECALL: 1800 802 914