



**Industrial Hydraulic Services Pty Ltd**

ABN 40 004 985 559

371-397 Plummer Street, Port Melbourne, Victoria, Australia, 3207

Tel: +61 3 9645 1522 Fax: +61 3 9646 5966

Email: info@ihs-aust.com.au Web: www.ihs-aust.com.au

# ISEKI



**FOR FURTHER INFORMATION, PRICING, SALES & SERVICE CONTACT:**

**HILTON FORD - MACHINERY SALES**

**PH: 0448 309 365 FAX: 03 9646 5966 EMAIL: hilton@ihs-aust.com.au**



**MASSEY FERGUSON**



ISEKI<sup>TM</sup> RANGE



20 & 23hp

## TM Range Compact Tractors

Smart, Reliable...  
Created with you in mind.





# ISEKI

## ISEKI TM RANGE TRACTORS

The new Iseki TM Series - your complete package for versatility and performance. Whether you're a small land-holder or a commercial enterprise, the new Iseki TM range of compact tractors will deliver the goods time and time again.

Powerful Iseki engines, strong construction and smartly designed operator area mean you get the job done fast, efficiently and in comfort. These are the typical hallmarks of Iseki tractors - built to uncompromising standards that have seen Iseki at the forefront of compact tractor design for over 80 years.

No matter whether you need a rugged, workhorse for agricultural applications or a smooth, soft-touch for turf requirements, the Iseki TM range has the right solution for all your business needs.

### FEATURES



**ENGINE**

- Powerful Iseki 3 cylinder water-cooled engines.
- Quiet and efficient.
- Large displacement offers full power at low engine RPM.
- Removable side panels allow easy access to the engine, making service and regular maintenance easier.



**HYDROSTATIC TRANSMISSION**

- Two-range hydrostatic transmission.
- Separate pedals for forward & reverse directional control.
- 4 wheel-drive and differential lock for exceptional traction in all conditions.
- Wet disc brakes - large oil immersed multi-disc brakes.



**CRUISE CONTROL**

- Cruise control standard on the TM3240.
- Simple, lockable lever to maintain a constant speed.
- Ideal for applications where precise speeds are required.
- All metal levers for strength and durability.
- Conveniently located for on-the-move operation.

# 20 & 23 HP compact tractors


## THE ISEKI DIFFERENCE

When you choose Iseki, you're not simply buying a tractor, you're investing in 80 years of industry-leading engineering and manufacturing experience. Experience that continues to produce high quality and top performing products that are built to meet today's ever increasing demands.

While Iseki has made its mark internationally, you can still feel confident knowing that they understand the unique industries of each country. During their 25 years in the Australian market they have built solid and reliable foundations, continuously delivering superb products and services that work even harder for your specific needs.

You get the expertise of your local Iseki dealer who will match the right tractor to your business and even provide flexible finance options to help fund your purchase.

Combine this with peace of mind from first-class parts and service support and you'll see what we mean by the Iseki Difference.

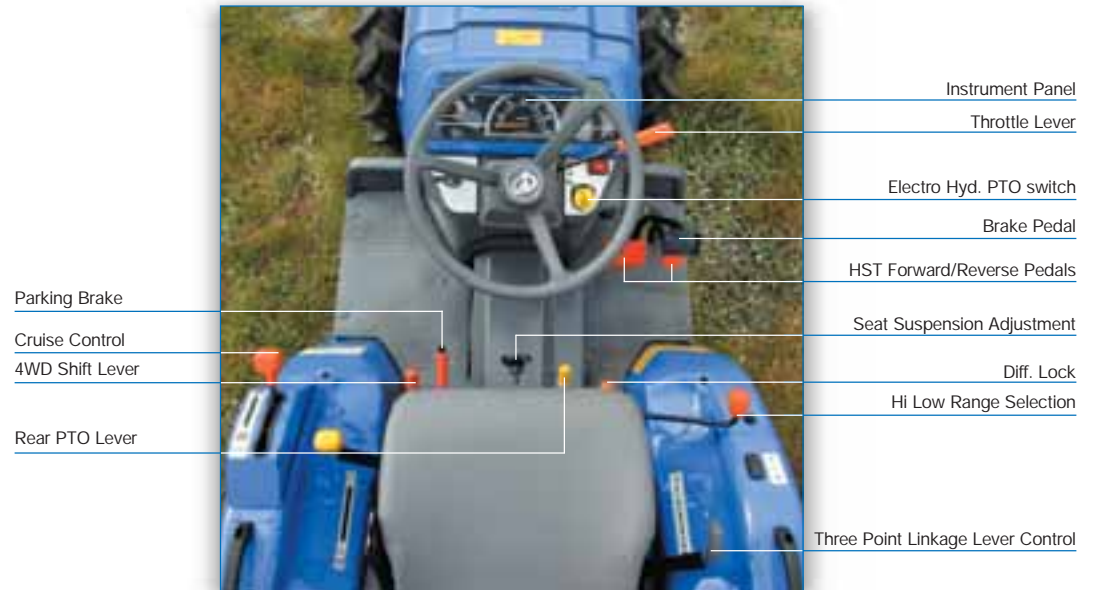

### OPERATORS PLATFORM

- Large operator's deck with ample leg-room, enabling easy access for mounting and dismounting.
- Rubber mounted deck with full floor mat and rubber padded pedals, reducing vibration and driver fatigue.
- Easy to read instrument panel.
- Comfortable high back, fully adjustable spring suspension seat.



### HEAVY DUTY AXLES

- Robust front and rear axles to handle the toughest of jobs.
- Reinforced chassis to handle a wide range of multi-purpose accessories.
- Designed with strength for front end loader applications.
- Tight turning circle.
- Large diameter tyres allow a gentler footprint & improve traction.



### THREE POINT LINKAGE

- Large three point linkage lift capacity of 540 kg.
- Inner electro-hydraulic PTO.
- Rear & mid mount PTO allows flexibility for a variety of implements.
- Large 20 lt/min hydraulic pump with open centre hydraulic system
- Adjustable telescopic stabilisers & crank-type lift rod for easier implement attachment.

# ISEKI Series TM SPECIFICATIONS

## 3200 R.O.P.S

### ENGINE

Type	Iseki E 3112 diesel
No. of cylinders	3
Displacement	1123cc
Power	20HP @ 2500 rpm
Alternator	12v 40amp 1800

### POWER TRAIN

Transmission type	Hydrostatic
Speeds	2F / 2R
Ranges	F - 21.1km/hr R - 14.4km/hr
Clutch	Dry disc
Differential	Bevel gear, with diff lock
Final drive	Bevel and pinion
Drive	4WD

### PTO

Type	Independent
Speeds	Rear - 540 rpm Mid - 2000 rpm

### STEERING

Type	Hydro Power steering
Steering angle	55 degrees
Turning radius	w/o brakes 2400mm w/ brakes 2100mm

### BRAKES

Type	Wet disc
Park brake	Mechanical hand brake

### HYDRAULICS

Pump output	19.8 lt/min
-------------	-------------

### LINKAGE

Category	1
Max lift	540kg (at lower link end)
Control	Position

### DRAWBAR

Type	Fixed
------	-------

### CAPACITIES

Fuel tank	25 litres
Engine oil	3 litres
Transmission	14 litres
Cooling	5.1 litres

### WHEEL EQUIPMENT

Front AG	5.00 - 12 - 4
Rear AG	8.00 - 18 - 4
Front turf	20.5 x 800 - 10
Rear turf	29 x 1200 - 15

### DIMENSIONS

Overall length	2680mm
Overall width	1160mm
Overall height	2315mm (rops)
Wheel base	1520mm
Ground clearance	285mm ( rear axle )
Weight	710kg

### ROPS

Type	Two post fold down
------	--------------------

## 3240 R.O.P.S

### ENGINE

Type	Iseki E 3112 diesel
No. of cylinders	3
Displacement	1123cc
Power	23HP @ 2600 rpm
Torque	60Nm @ 1600 rpm

### POWER TRAIN

Transmission type	Hydrostatic
Speeds	2F/2R
Cruise control	Std.
Ranges	F - 21.1km/hr R - 15.1km/hr
Differential	Bevel gear, with diff lock
Final drive	Bevel and pinion

### PTO

Type	Independent
Speeds	Rear - 540 rpm Mid - 2000 rpm

### STEERING

Type	Hydro Power steering
Steering angle	55 degrees
Turning radius	w/o brakes 2400mm w/ brakes 2100mm

### BRAKES

Type	Wet Disc
Park brake	Mechanical hand brake

### HYDRAULICS

Capacity	20.6 litres
----------	-------------

### LINKAGE

Category	1
Max lift	540kg (at lower link end)
Control	Position

### DRAWBAR

Type	Fixed, bolt on
------	----------------

### CAPACITIES

Fuel tank	25 litres
Engine oil	3 litres
Transmission	14 litres
Cooling	5.1 litres

### WHEEL EQUIPMENT

Front AG	5.00 - 12 - 4
Rear AG	9.5 - 16
Front turf	23 x 10.5 - 12
Rear turf	315/75D - 15

### DIMENSIONS

Overall length	2680mm
Overall width	1160mm ( Tyre )
Overall height	2315mm ( Rops )
Wheel base	1520mm
Ground clearance	280mm ( Rear axle )
Weight	710 Kg

### ROPS

Type	Two post fold down
------	--------------------

Specifications, standard and optional equipment on products change from time to time.  
Please consult your local dealer to ensure your expectations are matched by the product which will be available locally at the time you take delivery.

[www.agco.com.au](http://www.agco.com.au)



smart, reliable created with you in mind



FREECALL: 1800 802 914